


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : G09G 1/28		A1	(11) International Publication Number: WO 91/10223
			(43) International Publication Date: 11 July 1991 (11.07.91)
<p>(21) International Application Number: PCT/US90/06206</p> <p>(22) International Filing Date: 1 November 1990 (01.11.90)</p> <p>(30) Priority data: 455,195 22 December 1989 (22.12.89) US</p> <p>(71) Applicant: DAVID SARNOFF RESEARCH CENTER, INC. [US/US]; 201 Washington Road, CN5300, Princeton, NJ 08543-5300 (US).</p> <p>(72) Inventors: STEWART, Roger, Green ; 3 Ski Drive, Neshanic Station, NJ 08853 (US). ROACH, William, Ronald ; 70 Hickory Court, Rocky Hill, NJ 08553 (US).</p> <p>(74) Agent: BURKE, William, J.; David Sarnoff Research Center, Inc., 201 Washington Road, CN5300, Princeton, NJ 08543-5300 (US).</p>			<p>(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent).</p> <p>Published With international search report. With amended claims.</p>
<p>(54) Title: FIELD-SEQUENTIAL DISPLAY SYSTEM UTILIZING A BACKLIT LCD PIXEL ARRAY AND METHOD FOR FORMING AN IMAGE</p>			
<p>(57) Abstract</p> <p>A back-lighted color LCD display (231) is formed by placing a single matrix of liquid crystal devices (LCDs) over a bank of red, green and blue fluorescent lamps (202-218). The LCD matrix is operated to sequentially form separate red, green and blue images synchronous with the illumination of the respective red, green and blue lamps. The flashing of the sequential red, green and blue images is perceived as a color image. The images are scanned, one line at a time, onto the LCD matrix. The bank of fluorescent lamps includes several lamps of each color which are arranged in parallel with the lines of the LCD matrix. The different lamps of each color are activated in synchronism with the scanning of the LCD matrix. Each LCD in the matrix includes a rapidly varying liquid crystal material, sandwiched between conductive plates. The electric field between the conductive plates may be controlled by a polysilicon thin-film transistor (256).</p>			

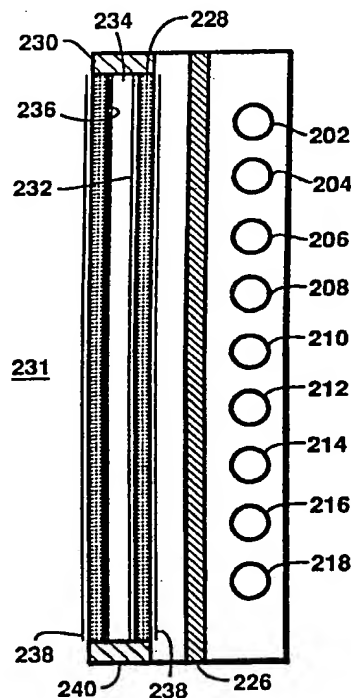

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

FIELD-SEQUENTIAL DISPLAY SYSTEM UTILIZING A BACKLIT LCD PIXEL ARRAY AND METHOD FOR FORMING AN IMAGE

This invention was made with U.S. Government support
5 under Contract No. F33615-88-C-1825 awarded by the
Department of the Air Force. The U.S. Government has certain
rights in this invention.

BACKGROUND OF THE INVENTION

10

Field of the Invention

The present invention relates to liquid crystal display and
more particularly to a backlit field sequential color display
15 system.

Description of the Prior Art

The most widely used method of generating electrically-
20 controlled color images uses a cathode ray tube (CRT) having a
matrix of phosphor stripes or dots representing three primary
colors and three electron guns which excite respectively
differently ones of the color phosphors. Because the different
colors are scanned simultaneously, and color separation
25 depends upon position, this type of system is known as an "area
multiplexed" video display system. Display systems of this type
are advantageous because they are bright, relatively
inexpensive and based on well-understood technology.
However, CRTs are not suitable for use in every situation due to
30 their relatively high power consumption, bulk, weight, and
fragility.

Monochrome CRTs, that is CRTs having a uniform white
phosphor coating, were used in an early type of color display
system known as a "field sequential" display. This system was
35 introduced by CBS Laboratories in the late 1940s for use in
commercial television broadcast equipment. The CBS system
sent distinct sequential red, green and blue image fields, in
sequence, to the TV receiver. The receiver had a rotating color

filter wheel in front of a single, white monochrome CRT screen. Synchronization of the three fields with the rotation of the filter wheel resulted in a color video display.

5 Recently, monochrome CRTs have been combined with non-moving, switchable color filters covering the CRT screen to yield colored images by this same principle. Typically, three distinct white images are displayed on the CRT screen in sequence. The color transmitted by the switchable filter is synchronized with the sequence of images. This creates a
10 repeating sequence of distinct colored images (for example, red, green, blue, red, green, blue, ...). If the sequence rate (or "refresh rate") is high enough, the separate images combine in the eye of the viewer to make one colored image. The desirable frame rate which displays a flicker-free color image is
15 approximately three times the frame rate for an area multiplexed system (e.g. 180 Hz, versus 60 Hz).

The switchable filters in these systems include: color selective linear polarizing filters in conjunction with twisted nematic liquid crystals (U.S. Pat. No. 4,758,818 to Vatne, July 19,
20 1988; IBM Technical Disclosure Bulletin, Vol. 22, No. 5, Oct. 1979, pp. 1769-1772, by Brinson and Edgar); liquid crystals which include pleochroic dyes (U.S. Pat. No. 3,703,329 of Castellano); and liquid crystals with birefringent materials (U.S. Pat. No. 4,097,128 of Matsumoto).

25 While avoiding the complexity and alignment problems of color matrix CRTs, these systems suffer from the drawbacks inherent in a monochrome CRT such as bulk, weight and power requirements. In addition, the color filters used in these systems, which may include as many as five or six panels,
30 absorb a large proportion of the light emitted by the CRT, thus requiring a very bright CRT screen if brightness equivalent to an area-multiplexed display is to be maintained.

Because of these drawbacks, these CRT-based color display systems may be replaced by a new type of video
35 display for certain applications. This new type of display is based upon a panel comprised of an array of light valves, each light valve corresponding to a single picture element, or pixel.

When the array is illuminated from behind, typically by florescent or incandescent lamps, images can be formed by selectively opening and closing certain of the valves in the array. In displays of this type, the light source does not form
5 the image directly; it should in fact be diffuse, so as to be evenly transmitted through the light valve array.

The most commonly used light valve now available is the liquid crystal (LC). Liquid crystal devices (LCDs) may be used to produce light-weight, compact, relatively high contrast display
10 panels that use much less power than otherwise equivalent CRT display devices. These display panels are particularly useful as display devices in a portable computer or in an airplane cockpit where weight and power consumption are critical.

In a typical monochrome application, a matrix of LCDs,
15 each occupying the area of one pixel, are constructed with integral thin film transistors (TFTs). The TFTs are individually addressed by circuitry external to the display device. When a TFT is addressed, it opens its associated LCD light valve allowing the back-light to pass through that pixel position in the array.
20 When a pattern of LCD light valves is energized, an image is displayed on the LCD matrix. A display of the type described above is generally referred to as an LCD display. When the TFTs in an LCD display are controlled to only partially open their respective light valves, the image may include greyscale
25 information. A system of this type is described in U.S. Patent No. 4,742,346 to Gillette et al.

Monochrome LCD displays are widely used for computer displays and for video displays in small television sets. Recently, there has been a growing interest in color LCD
30 displays. To be practical, a color LCD display should have brightness and longevity which approximates that of a color CRT and a refresh rate high enough to show smoothly moving images without flicker.

Currently, there are several types of color LCD display.
35 One type of display uses LCDs in a consumer-market video projector. In this projector, the LCDs are not viewed directly, but act as does film in a movie projector. Steady-output colored

light sources illuminate respectively different LCDs and the separate colored images produced by the LCDs are combined and projected onto a screen. In an exemplary LCD projector, the XV-100P projector manufactured by Sharp Corporation, there
5 are three light sources (red, blue, and green) and three LCDs. Dichroic mirrors are used to separate white light into the three light sources and also to combine the separate images produced by the three LCDs into a single image. This image may be projected onto a screen using conventional optical lenses.

10 A hybrid display system using both CRTs and an LCD matrix uses three monochrome color CRTs (red, green, and blue) as light sources. Light from each CRT screen is picked up by a separate bundle of optical fibers fastened to the face of the CRT. The fibers of the bundles attached to the respective red, green,
15 and blue CRTs are then alternately intermixed at their termination, which is fastened to the thin edge of a plastic light-diffusing plate. This plate is designed to provide uniform diffused illumination from its side when the edge is illuminated by the fiber bundle. The three CRTs are activated sequentially
20 at an individual rate of 30 Hz; the combined rate is 90 Hz. An LCD panel covering the illuminating side of the plastic diffusing plate forms a field sequential image by spatially modulating the red, green, and blue images transmitted by the LCD. The generation of red, green and blue images on the LCD panel is
25 synchronized with the light flashes from the respective CRTs.

This system is described in an article by H. Hasabe and S. Kobayashi entitled "A Full-Color Field-Sequential LCD Using Modulated Backlight," in the SID 85 Digest, pp.81-83. It uses a thin display panel, but requires three optical fiber bundles and
30 uses three CRTs. Light is lost in passing from the CRT screen into the fiber array and through the diffusing panel, as well as in the LCD matrix. This display system is described as having a brightness of only 30 foot-lamberts (fL) as compared to 100 fL for a CRT display. Moreover, since this display system uses
35 CRTs to produce the backlight, it suffers from the bulk, weight, and power consumption problems of conventional CRT displays.

Other prior-art designs for color LCD panels employ a white light source and an LCD panel tessellated with sub-pixel size color filter elements. Each individual filter element is aligned to cover, for example, one-third of one image pixel.

5 Each pixel includes three separate TFTs and three respectively different primary color filter elements. Display systems of this type are referred to as area multiplexed color systems. The three primary color images are displayed simultaneously by energizing the respective sub-pixel image elements. An area

10 multiplexed display of this type is described in an article by G. Stix, entitled "Manufacturing hurdles challenge large-LCD developers" in the IEEE Spectrum, September 1989, pp 36-40.

Area multiplexed LCD panels are less efficient than monochrome panels because of the color filter elements.

15 Typical filter elements used in these displays pass only about twenty percent (20%) of the incident light.

Another consideration is that the distance between the pixels should be small enough so that the eye of the viewer does not perceive the image as excessively grainy. The

20 individual sub-pixel elements of any particular color are not adjacent in area multiplexed systems; each pixel contains all three primary color sub-pixels and desirably has a cell dimension that does not exceed the grainy limit. This means that the sub-pixels must be smaller, by a factor of at least the

25 square root of three, than the pixels. Thus, a portion of an image which is composed of a single color is dimmer by at least a factor of the square root of three than a white portion of the image.

In addition, each of these sub-pixels has a separate

30 energizing TFT with associated addressing lines. These elements tend to decrease the fill factor of the display (the fill factor is defined as the proportion of panel area which transmits light). This reduced fill factor further reduces the brightness of an area-multiplexed LCD display as compared to a

35 monochrome LCD array.

Since the filter mosaic is integral with the LCD panel, the individual filter elements are desirably aligned very closely

with their associated sub-pixels. The presence of these filter elements restricts the high-temperature processing steps which may be performed on the LCD array. Furthermore, the chemical dyes which are used to form the filter elements are subject to degradation over time.

A further disadvantage of area multiplexed screens is the appearance of "artifacts" in the image due to the smaller size of the sub-pixels as compared to monochrome pixels. One type of artifact is caused by "charge-sharing" between adjacent pixels. The liquid crystal material in an LCD is energized by placing an electric field across the material in the pixel area. Since the sub-pixel elements are relatively small, charge from one sub-pixel may affect the liquid crystal material beneath an adjacent sub-pixel. This may affect the purity of the displayed color.

SUMMARY OF THE INVENTION

A field-sequential display device for producing color images employs a panel comprising a matrix of small light valves, the light transmissive properties of which can be selectively controlled. The display device includes a plurality of colored light sources which are strobed to illuminate the panel from behind. Single-color images representing separate components of a composite image are formed by scanning a sequence of lines. The display device includes a scanner which scans each of the colored light sources in synchronism with the scanning of the lines of the image. The invention also includes a method of displaying an image comprising the steps of selectively controlling the light transmissive properties of a matrix of light valves in a display panel means wherein single-color images representing separate components of the color image are formed by sequentially activating successive lines of light valves in the matrix of light valves; alternatively strobing a plurality of colored light sources to provide light for transmission through the matrix of light valves; and activating each of the colored light sources in spatial correspondence with the scanning of the lines of the light valve matrix.

BRIEF DESCRIPTION OF THE DRAWING

FIGURE 1 is a block diagram of a field sequential color display system which includes an embodiment of the invention.

5 FIGURE 2a is a cross sectional view of a field sequential LCD display device suitable for use in the color display system shown in FIGURE 1.

FIGURE 2b is a front plan view of the field sequential LCD display device shown in FIGURE 2a.

10 FIGURE 3 is a perspective view of a fluorescent lamp tube suitable for use in the LCD display device shown in FIGURES 2a and 2b.

FIGURE 4 is a block diagram of timing and lamp driving circuitry suitable for use with the field sequential color display system shown in FIGURE 1.

15 FIGURE 5a is a block diagram of a timing and delay circuitry suitable for use with the field sequential color display system shown in FIGURE 1.

FIGURE 5b is a block diagram of color gating circuitry suitable for use with the color display system shown in FIGURE 1.

20 FIGURES 6 and 7 are timing diagrams showing signal amplitude as a function of time for several signals used by the color display system shown in FIGURE 1.

25

DETAILED DESCRIPTION

In the exemplary embodiment of the invention, as shown in FIGURE 1, an active LCD display panel 114 is successively
30 driven with red, green and blue video information obtained from a source of video signals 102. Color is obtained by flashing red, green, or blue fluorescent backlights at the end of liquid crystal settling time for each field. The fluorescent lamp tubes are arranged in staggered banks of red, green and blue. In
35 operation, the red lamps are flashed in sequence responsive to commutation circuitry 112 as the red video information is scanned onto the LCD display panel, the the green lamps are flashed in sequence as the green information is displayed and

then the blue lamps are flashed in sequence as the blue information is displayed.

In FIGURE 1, a digital sampled data video signal is provided by the source 102 responsive to a clock signal PCLK provided by timing circuitry 110. The source 102 used in this embodiment of the invention may include a digital memory having a number of storage locations sufficient to hold a frame of video information. Each stored video sample consists of a three-bit value which defines the color of the displayed pixel. In this exemplary embodiment of the invention, the sample values zero to seven correspond to the colors black, blue, yellow, red, cyan, green, magenta and white. It is contemplated that each sample may also include a multi-bit luminance part for use with an LCD display device that can display gray scale.

In operation, the source 102 is scanned at a rate sufficient to provide information to the LCD array 114 at a frame rate of 180 Hz. In this configuration, each frame is repeated three times.

The frames are provided as lines of sample values by the source 102 to color gate circuitry 108. A pixel drive value is selectively provided by the gate circuitry 108 to the data circuitry 104, based on the values of the samples. For example, if a sample has a value of one, indicating that it is yellow, the color gate circuitry 108 provides a signal substantially at ground potential for the sample during the red and green frame intervals and a signal at a positive potential, $V+$ during the blue frame interval. Consequently, the corresponding LCD transmits light during the red and green frame intervals and blocks the light during the blue frame interval to display a yellow pixel. The color gate circuitry is described below with reference to FIGURE 5b and the data circuitry 104 is described below with reference to FIGURE 2b.

When a line of pixel samples is loaded into the data circuitry 104, a single row of TFTs in the LCD array 114 is activated to transfer the sample values stored in the data circuitry onto capacitors which control the transmissivity of the pixel cells in a line of the image. The row of TFTs is activated

by LCD scanner circuitry 106 which is controlled by the timing circuitry 110. This circuitry is described below in reference to FIGURE 2b.

5 The timing circuitry 110 also controls the sequencing of the lamps 200 through 218 (shown in FIGURES 2a and 5a) behind the LCD array. In the exemplary embodiment of the invention, these lamps are activated in a sequence which is synchronized to the activation of rows of pixels in the LCD array 114. There are two reasons for scanning the lamps 200 through 10 218 in synchronism with the scanning of the display. First, for the pixel cells that are activated near the end of a frame interval, a sharper image is obtained when the excitation of the lamp is delayed to match the activation of the line of pixel cells. This allows the pixel cells adequate time to stabilize before they 15 block or transmit light. Second, the commutation of the lamps reduces the radio frequency interference (RFI) produced by the device since smaller and more frequent pulses are produced to drive the commutated lamps than would be produced if all of the lamps of a single color were flashed simultaneously.

20 The use of a scanned display also provides a greater set-up time for the individual pixel cells. Since only a relatively small number of pixel cells need to be active at any given time. During the time interval that some of the pixel cells are active, the remaining pixel cells in the display 114 may be in transition 25 without affecting the perceived quality of the image. The timing and lamp driving circuitry 110 and the commutating circuitry 112 are described below in reference to FIGURES 5a and 6.

FIGURE 2a is a cross-sectional diagram of the LCD display 30 panel 114, shown in FIGURE 1. This cross-section is not to scale; it is expanded horizontally to aid in describing the structure of the panel 114. The lamps 202 through 218 are arranged at the back of the display panel. These lamps are interleaved such that the lamps 202, 208, and 214 are red lamps, the lamps 204, 35 210 and 216 are green lamps and the lamps 206, 212 and 218 are blue lamps.

The angle of the light incident on the display from lamps 202 through 218 is randomized by a diffusion plate 226. The light provided by the diffusion plate is either passed or blocked by the individual pixel elements in an LCD array 231. The array 231 includes liquid crystal material 234 sandwiched between two glass plates 228 and 230.

In the exemplary display system, the display light valves and individual backlight elements are both designed to switch in a period which is small compared to each of the individual color field periods. The optimal thickness depends upon the liquid crystal material, e.g. twisted nematic, ferroelectric, guest-host, and the mode of operation, e.g. twisted, birefringent or pi cell. The liquid crystal material 234 used in this embodiment of the invention is ZLI 2293 of E Merck and Company, a standard twisted nematic material, selected for its relative speed, chemical inertness and stability. The plates 228 and 230 are separated by between about one and four micrometers (μm) and are hermetically sealed by an epoxy seal 234 which extends around the perimeter of the two plates. The epoxy sealant used in the exemplary embodiment of the invention has a cure temperature of approximately 150 degrees Celsius. This high temperature is advantageous in driving moisture from the space between the plates 6 and 7 during fabrication. In this embodiment of the invention, higher temperatures may be used to cure the epoxy than may be used with an area multiplexed display because the present display does not include color dyes which may be adversely affected by the high temperature processing. After the epoxy sealant has been cured, the liquid crystal material 234 is inserted through a hole (not shown) in the seal. The hole is then sealed using, for example, an indium plug and a relatively low-temperature epoxy.

Polarizing coatings 238 are placed on the sides of the glass plates away from the liquid crystal. These coatings are oriented to pass light which is polarized in crossed directions, e.g. one coating passes horizontally polarized light and the other passes vertically polarized light. The twisted nematic LCD material twists the polarization of the light by 90° in the absence of an

electric field. Thus, when not activated, an LCD cell transmits light and when activated it blocks light.

The side of the glass plate 228 which is closest to the liquid crystal material 234 is covered with a transparent
5 conductive coating such as tin oxide or indium oxide. This coating is coupled to a source of reference potential (e.g. ground) and forms one plate of the capacitance which controls the transmissive properties of the liquid crystal material.

The side of the plate 230 which is closest to the liquid
10 crystal material is covered with a matrix 236 that forms the active electrical portion of the LCD display. The matrix 236 includes an array of transparent conductive plates, such as the plate 258, one for each pixel position in the display. Each of these conductive plates 258 is each coupled to a vertical data
15 line (e.g. 250) and a horizontal scan line (e.g. 254) by a thin-film transistor (e.g. 256). The conductive plates 258 are formed from tin oxide or indium oxide coating and the TFTs 256 are formed from polysilicon which is vapor-deposited onto the glass
20 plate 230. The data and scan lines, 250 and 254 respectively, are formed by aluminum deposited over an oxide grown on the polysilicon. For the sake of simplicity, only one conductive plate 258, one TFT 256, one scan line 254, and one data line 250 are schematically illustrated in FIGURE 2b. In an actual display device, however, there would be one conductive plate and one
25 TFT for each pixel position, one scan line for each row of pixel positions and one data line for each column of pixel positions.

When the TFT 256 is activated by a pulse on the scan line 254, it changes the charge on the conductive plate 258 to match the potential on the data line 250. If this potential is ground,
30 the LCD cell will transmit light. If the potential is positive, the LCD cell will block the light.

The data circuitry 104 may include a shift register 246 which is loaded one bit-position at a time by the signal provided by the color gate circuitry 108 of FIGURE 1. When an
35 entire line of pixel values has been loaded into the shift register 246, it is transferred in parallel into a buffer register 248. The contents of the buffer register 248 are applied to pixel data

lines 250 which are arranged vertically on the face of the LCD panel with a spacing of one pixel width. During the time interval in which the next line of pixel values is being loaded into the shift register 246, one of the scan lines 254 is pulsed to transfer the pixel values in the buffer register 248, via the data lines 250, onto the respective conductive plates 258 which cover one the line of pixel positions.

In this embodiment of the invention, the scan lines 254 are coupled to a shift register 252 which is controlled by a clock signal, LCK, provided by the timing circuitry 110. This shift register is configured to transfer a predetermined logic value from stage to stage, where each stage corresponds to a line in the image. During the time that the logic value resides in a particular stage, an activating signal is applied to the gate electrodes of the TFTs 256 coupled to the conductive plates 258 on the corresponding line of the display device. This signal allows the TFTs to charge the plates to the potentials of the respective pixel elements as stored in the buffer register 248.

To obtain high contrast in the LCD array, the pixel TFTs should provide a relatively high drive current to quickly turn on the pixel. The desired drive current for the disclosed field sequential display device may be greater than that for an area multiplexed display device since the area of each pixel in the field sequential device is greater than in the area multiplexed device and since it is desirable to change the pixels in the field sequential system at a faster rate (e.g. 180 Hz) than in the area multiplexed system (e.g. 60 Hz).

Pixel transistors having the desired switching speed and current capabilities may be fabricated using conventional thin-film techniques on vapor-deposited polysilicon. In the exemplary embodiment of the invention, 10 μm design rules are used. All of the TFTs in the exemplary pixel array are N-channel enhancement mode MOS devices.

The TFT array is fabricated on glass substrates at temperatures below 600 degrees Celsius. In the prior art, quartz has been used as a substrate for high-temperature processes, but quartz is relatively expensive compared to glass.

Inexpensive, low-temperature glass substrates do not allow the use of thermally-grown gate oxides.

In the present embodiment of the invention, the glass plates 228 and 230 may be fabricated using either Corning Glass #7059 or Hoya Glass #NA-40. Since this plate serves as a substrate for the deposition of the pixel matrix, it must be annealed to compact the glass so that it is dimensionally stable during the thermal cycling of the deposition process. The temperatures involved in the processing steps are in the range 400 to 600 degrees Celsius.

Figure 3 is a perspective view of one of the lamps 202-218 used in the exemplary embodiment to provide the back lighting for the LCD display. These lamps are mercury vapor lamps that are internally covered with one of three single-phosphor coatings designed respectively to emit three primary colors; in the exemplary embodiment these are red, green, and blue with C.I.E. coordinates (x,y) respectively (.57,.35), (.29,.57), and (.12,.08). The corresponding saturated-color spectral wavelengths are respectively 605 nanometers (nm), 548 nm, and 472 nm.

Each of the lamp tubes is approximately seven millimeters (mm) in diameter. For uniform illumination they are preferably closely packed (e.g. at 8 mm centers) and are long enough to extend two to four centimeters (cm) past either end of the display section of the panel. To facilitate the description of the described embodiment of the invention, only nine lamps, 202-218, are shown. In the preferred embodiment of the invention, 24 lamps are used to illuminate an 8 by 12 inch display. The illustrated design may be readily extended by one ordinarily skilled in the art to operate with 24 lamps.

Having a large number of lamps enables one to operate the system in a continuous scrolling mode where the number of activated lamps remains approximately constant and progressively scans the light valve array in synchronism with the scrolling electrical activation of the light valve array. This will usually include simultaneous illumination of different parts of the array by different color lamps. When operating in the

scrolling mode, this display is divided into at least three regions, ie a first region well ahead of the scan which contains prior color field data (for example red); a second region behind the scan which contains new color field data (for example green);
5 and a third transition region near the scan boundary where the pixels are in transition from red to green. In this example of the scrolling mode, the backlight is designed so that all red lamps which can illuminate the red first region are on; all green lamps which can illuminate the green second region are on; and
10 that all lamps which can illuminate the transition region are off.

To increase the brightness of the display, the insides of the glass lamp tubes are coated with phosphor 302 only three-quarters of the way around (subtending approximately 270 degrees); a longitudinal stripe 304 subtending the remaining 90
15 degrees is left clear glass to emit more light in that direction. The 90-degree stripe is aligned toward the diffusion plate 226, shown in FIGURE 2, to maximize panel brightness. In this instance, it may be desirable to place filters over the red and green lamps to block the blue light that is produced by the
20 ionized mercury vapor and is passed through the clear glass stripe 304. The tubes may also be entirely coated with phosphor and silvered beneath the phosphor three-quarters of the way around the inside circumference of the bulb. The lamps 202 through 218 should be bright enough provide a total
25 illumination of approximately 2000 fL at maximum illumination.

As set forth above, the field-sequential color system operates at a 180-Hz field refresh rate, three times faster than conventional area multiplexed LCDs. To meet this field rate,
30 each lamp should be able to turn on for a period of approximately 5 millisecond (ms) with a repetition rate of 60 Hz. The lamps 202-218 used in this embodiment of the invention are of the hot cathode type for quick response: light emission rises with current substantially instantaneously, and
35 decays within 500 microseconds (μ s) of the current cessation (end of UV excitation). Light flashes can be as short as 1 ms and can repeat at 60 Hz.

Changes in the duty cycle of the lamps can be used to momentarily highlight or dim the display. As long as the cathode is hot, the starting pulse can be arbitrarily small in duration, so the screen can be dimmed substantially without
5 limit.

An advantage of the invention over area multiplexed systems is the ability to change the color balance of the display by changing the relative duty cycles of the red, green and blue banks of lamps, or even by replacing the backlight tubes with
10 tubes of another color. Also, correction for intensity and color nonuniformities can be made by individually adjusting the flash duration of each lamp. This may be useful to compensate for individual failed or weak lamps.

For long lamp life, the peaking factor (ratio of maximum
15 instantaneous lamp current to steady-operation lamp current) of between 3 and 5 is desirable for the lamps 202-218. This peaking factor is desirable since the lamps are driven with current pulses at a relatively high rate.

FIGURE 4 is a block diagram of the timing and lamp
20 driving circuitry 110, shown in FIGURE 1, which drives the lamps 202-218, the LCD pixel array 231 and the source of video signal 102. The clock signals CKP, CKL and CKF which define the respective pixel, line and frame rates used in the display system are produced by a clock generator 402. The generator
25 402 may include, for example, a resonant crystal controlled oscillator (not shown) having a free running frequency at the desired pixel rate and pulse shaping circuitry (not shown) to produce the signal CKP. In addition, the clock generator 402 may include frequency dividing circuitry (not shown) which
30 divides the signal CKP in frequency to produce the line rate clock signal, CKL, and the frame rate clock signal, CKF. Circuitry suitable for use as the timing circuitry 110 may be readily constructed by one ordinarily skilled in the art of digital signal processing circuit design.

35 The signal CKP is provided by the circuitry 110 to the source of video signal 102 as shown in FIGURE 1 to condition the source 102 to provide pixel samples to the data circuitry

104 of the LCD display device 114. This signal defines the rate at which sample values are shifted into the shift register 246, shown in FIGURE 2, of the data circuitry 104. Although the exemplary embodiment of the invention shows sample values
5 being provided one at a time by the source 102, it is contemplated that multiple pixel samples may be simultaneously provided to the shift register 246. In this instance, the frequency of the clock signal CKP would be reduced in direct proportion to the number of samples
10 provided.

The frame rate clock signal, CKF, is provided by the clock generator 402 to timing and delay logic circuitry 404. The circuitry 404 generates a set of eight signals, DD, which define the display drive intervals for the eight colors, black, blue,
15 yellow, red, cyan, green, magenta and white.

The logic circuitry 404 also generates a set of nine signals, LD, which define the drive intervals for the nine lamps 202-218. The nine signals LD are each differentiated and logically ORed by a differential circuit 406. The differential circuit 406
20 may include, for example, nine capacitors (not shown) configured in series with the nine lamp drive signals LD; nine pulse forming circuits (not shown) to convert the pulses provided by the capacitors into logic levels, and a nine-input OR gate (not shown).

25 The output signal provided by the circuit 406 is applied to high voltage ignition circuitry 410 which is coupled to the lamp power supply 408. In response to a positive-going transition on any of the signals LD, the differential circuit 406 conditions the high voltage ignition circuit to apply a relatively high voltage
30 pulse to one end of each of the lamps 202-218 whenever any one of the lamps is to be ignited. The ignition circuitry 410 may include, for example a power MOSFET (not shown) which is coupled to selectively apply power to a conventional auto-transformer (not shown).

35 The lamp drive signals LD provided by the logic circuitry 404 are also applied to respective current control devices 412 which are coupled to the respective lamps 202-218 at the ends

opposite to the connection with the high voltage ignition circuitry 410. Each current control device 412, which may include a power MOSFET transistor (not shown), is controlled by its associated signal LD to provide a connection between its associated lamp and a source of reference potential (e.g. ground) only when the lamp is to be ignited.

In this embodiment of the invention, a brightness control circuit is provided between the current control devices and ground. This circuit regulates the amount of current provided to the lamps when they are activated to control the brightness of the display.

The circuitry used for the differentiator 406, the lamp power supply 408, the high voltage ignition circuit 410, the current control devices 412 and the brightness control 414 are conventional in design and may be readily constructed by one of ordinary skill in the art.

FIGURE 5a is a block diagram of circuitry suitable for use as the timing and delay logic 404 of FIGURE 4. In this circuitry the frame rate clock signal, CKF, is applied to a modulo 3 counter 502. The counter 502 provides three signals which are inverted versions of the red, green and blue pixel display drive signals, respectively. These three signals are applied to buffer gates 514, 516 and 512, respectively to provide the drive signals for the respective cyan, magenta and yellow color signals. The signals produced by the counter 502 are also provided to respective inverters 506, 508 and 504, the output terminals of which are coupled to buffer gates 520, 522 and 518, respectively. The gates 520, 522 and 518 provide the drive signals for the respective colors red, green and blue. The drive signal for the color black is provided by a buffer gate 510 the input terminal of which is tied to a source of positive potential, V+, and the drive signal for the color white is provided by a buffer gate 524 the input terminal of which is tied to ground.

The yellow (i.e. not blue) display drive signal provided by the counter 502 is applied to a delay element 526 and the delayed signal provided thereby is applied to a monostable

multivibrator (one-shot) 528. The output signal of the one-shot 528 is a pulse signal which is timed and shaped appropriately to serve as the lamp drive signal, LD, for the red lamp 202. This signal is applied to the current control device 412 (shown in
5 FIGURE 4) which is coupled to the lamp 202. In response to this signal, the lamp 202 is conditioned to conduct an electric current provided by the high voltage ignition circuitry 410, as set forth above and so, to emit light.

The cyan and magenta display drive signals are coupled in
10 the same way to the respective delay element, one-shot pairs 530, 532 and 534, 536 to provide the lamp drive signals LD for the respective green and blue lamps 204 and 206. The LD signals for the lamps 202, 204 and 206 are delayed by respective delay elements 538, 540 and 542 to generate LD
15 signals for the respective red, green and blue lamps 208, 210 and 212. The LD signals for these lamps are further delayed by the respective delay elements 544, 546 and 548 to produce the LD signals for the respective red lamp 214, green lamp 216 and blue lamp 218.

20 FIGURE 5b illustrates a color gate circuit 108 (shown in FIGURE 1) suitable for use with the exemplary embodiment of the invention. In FIGURE 5b, the display drive signals black, blue, yellow, red, cyan, green magenta and white are applied to respectively different data input terminals of an eight-way
25 multiplexer 552. The control input port of the multiplexer is coupled to receive the three-bit video signal provided by the source 102. In response to this control signal, the multiplexer 552 passes one of the display drive signals to the data circuitry 104 of the display panel 114, shown in FIGURE 1. A value at
30 ground potential or at the positive potential V+ is passed depending on whether the corresponding pixel is to respectively transmit or block light emitted by the lamps 202-218.

FIGURE 6 is a timing diagram which illustrates the relative timing of the display drive signals, red, green and blue and the
35 lamp drive signals red-drive, green-drive and blue-drive. As shown in the timing diagrams, each of the display drive signals occurs at a time significantly before its corresponding lamp

drive signal. The delay between the display drive and lamp drive signals allows for signal propagation through the data circuitry 104, data lines 250 and TFTs 256 of the LCD panel 114 and allows for the time to charge the capacitor plate 258 and to reorient the liquid crystal material 234 beneath the plate 258. All of these events desirably occur before the lamp is flashed in response to the corresponding lamp drive pulse.

FIGURE 7 is a timing diagram which illustrates the relative timing of the lamp drive signals, LD, for the lamps 202-218. As illustrated by this diagram, the lamps that are closer to the bottom of the display panel 114 are activated later than the lamps closer to the top. The sequencing of lamps of each color is timed to follow the scanning of lines on the LCD display 231. As set forth above, the ignition of the lamps is delayed to ensure that the pixels near the bottom of the screen are properly set up before they are expected to transmit or block light.

The field-sequential color display system of the described embodiment of the invention can provide a display which is up to 500% brighter than a conventional area-multiplexed color display having individual color filters at each sub-pixel element. The color filters used in conventional area multiplexed systems absorb roughly eighty percent (80%) of the light in transmission. This loss factor is multiplied by an additional loss factor resulting from the lesser fill factor of area multiplexed LCDs (.55) versus field sequential LCDs (.77), a difference of about 1.4 times. As used in this description, the term "fill factor" is defined as the ratio of active pixel area to the area of the display panel.

Elimination of color filters also reduces registration problems between the filter mosaic and the LCD array, allows high temperature processing and avoids contamination of the liquid crystal material by the dye chemicals. Moreover, the greater light-transmission efficiency of the present invention, with the use of fluorescent lamps, results in three to six times less power and heat dissipation in the display of the invention as compared to a typical area multiplexed displays.

A full-color area multiplexed LCD has three times the number of pixels of a field sequential LCD. Since the difficulty of manufacturing increases with the number of elements, this greater number of pixel elements is a disadvantage. Because
5 the field sequential TFT plate is made with larger design rules and incorporates only one third the number of active devices, such a system can be fabricated with substantially higher yield than an area-multiplexed system.

To display saturated color with a 180 Hz refresh rate the
10 liquid crystal should desirably respond to changes in the electric field across the pixel capacitors in a time that is short compared to 5 ms. This response time is much less than for an area multiplexed system. However when displaying black and white information, the time constraints on the liquid crystal are
15 no more severe than for the area multiplexed display. In that special case, the liquid crystal orientation at each pixel is the same in each of the three color fields, so the response time required of the LC is no more severe than that for area multiplexed color. From this, it follows that the failure of the
20 field sequential color system with a slowly responding LC is characterized by color desaturation.

When desired, the display intensity may be increased with only moderate loss in color saturation from the 250 fL of normal operation to 500 fL by increasing the lamp duty cycle
25 from 12% to 25%. If a very bright display is needed to flash or highlight important information, the display may be pulsed to 2000 fL by first loading the array and then flashing all lamps at once.

It is clear that the invention also comprises a method for
30 generating a color image, comprising the steps of selectively controlling the light transmissive properties of a matrix of light valves in a display panel means wherein, single-color images representing separate components of the color image are formed by sequentially activating successive lines of light
35 valves in the matrix of light valves; alternatively strobing a plurality of colored light sources to provide light for transmission through the matrix of light valves; and activating

each of the colored light sources in spatial correspondence with the scanning of the lines of the light valve matrix. In the method of the invention each of the light valves in the matrix of light valves is a liquid crystal device, the light transmissive
5 properties of which are externally controlled; each of the plurality of colored light sources includes a plurality of individual colored light sources which may be independently activated; and the individual colored light sources of each one of
10 said plurality of colored light sources are spatially interleaved with the individual colored light sources of the other ones of said plurality of colored light sources. The plurality of colored light sources are configured to be alternately strobed in synchronism with the formation of single-color images on said
15 matrix of light valves. Each of the plurality of colored light sources includes a plurality of separately operable single-color light sources and the separately operable single-color light sources of the plurality of light sources are interleaved to provide illumination for the matrix of light valves.

It is also clear that alternate non-fluorescent light sources
20 may also be used in the display of the invention. Such alternatives may include a cathodoluminescent backlight or an electroluminescent panel. In addition, although the invention has been described in terms of an active matrix display, alternative addressing schemes such as direct multiplex can be
25 used.

The Invention Claimed Is:

1. Apparatus for generating a color image, comprising:
display panel means, including a matrix of light valves the
5 light transmissive properties of which can be selectively
controlled wherein, single-color images representing separate
components of the color image are formed by sequentially
activating successive lines of light valves in the matrix of light
valves;
10 a plurality of colored light sources which are alternately
strobed to provide light for transmission through the matrix of
light valves; and
means for activating each of the colored light sources in
spatial correspondence with the scanning of the lines of the
15 light valve matrix.
2. The apparatus of claim 1, wherein:
each of the light valves in said matrix of light valves is a
liquid crystal device, the light transmissive properties of which
20 are externally controlled;
each of said plurality of colored light sources includes a
plurality of individual colored light sources which may be
independently activated; and
the individual colored light sources of each one of said
25 plurality of colored light sources are spatially interleaved with
the individual colored light sources of the other ones of said
plurality of colored light sources.
3. The apparatus of claim 2 wherein each of said
30 individual colored light sources is a fluorescent lamp including a
hollow translucent form having a long dimension and a short
dimension, said form being coated with a fluorescent material
which emits light of said color except for a stripe parallel to the
long dimension which is not coated.
35
4. The apparatus of claim 3 wherein each of said
individual colored light sources is a fluorescent lamp coated

with a fluorescent material except for a stripe parallel to the long dimension which is not coated.

5 5. The apparatus of claim 2 wherein, each of said liquid crystal devices includes a twisted nematic liquid crystal material sandwiched between first and second control electrodes which are separated by a distance of less than four micrometers.

10 6. The apparatus of claim 2 wherein the light transmissive properties of the light valves are controlled by an associated thin-film transistor.

15 7. Apparatus for generating a color image, comprising: display panel means, including a matrix of light valves the light transmissive properties of which can be individually controlled, wherein, single-color images representing separate components the color image of are formed by activating the matrix of light valves; and

20 a plurality of colored light sources which are configured to be alternately strobed in synchronism with the formation of single-color images on said matrix of light valves to provide light for transmission through the matrix of light valves, wherein each of said plurality of colored light sources includes a plurality of separately operable single-color light sources and
25 the separately operable single-color light sources of said plurality of light sources are interleaved to provide illumination for said matrix of light valves.

30 8. The apparatus of claim 7 wherein:
the light valves in said matrix of light valves are arranged in rows and columns and said single color images are formed by activating successive rows of light valves in said matrix; and
said apparatus further comprises means for activating
35 successive ones of said separately operable single-color light sources of each of said plurality of colored light sources in

synchronism with the activation of successive rows of light valves in said matrix.

5 9. The apparatus of claim 8 wherein each of said individual colored light sources is a fluorescent lamp including a hollow translucent form having a long dimension and a short dimension, said form being coated with a fluorescent material which emits light of said color except for a stripe parallel to the long dimension which is not coated.

10

10. The apparatus of claim 9 wherein each of said individual colored light sources is a fluorescent lamp coated with a fluorescent material except for a stripe parallel to the long dimension which is not coated.

15

11. The apparatus of claim 7 wherein:

each of the light valves in said matrix of light valves is a liquid crystal device, the light transmissive properties of which are externally controlled; and

20

each of said liquid crystal devices includes a twisted nematic liquid crystal material sandwiched between first and second control electrodes which are separated by a distance of less than four micrometers.

25

12. The apparatus of claim 11 wherein the light transmissive properties of the light valves are controlled by an associated thin-film transistor.

30

13. Apparatus for generating a color image, comprising:

an image forming region comprising a matrix of light valves the light transmissive properties of which can be individually controlled;

first backlighting means for illuminating a first portion of said image forming region with light of a given color; and

35

second backlighting means for simultaneously illuminating a second portion of said image forming region with light of a second color.

14. The apparatus of Claim 13 wherein:
the light valves in said matrix of light valves are arranged
in rows and columns and said images are formed by activating
5 successive rows of light valves in said matrix.

15. Apparatus for generating a color image, comprising:
display panel means, including a matrix of light valves the
light transmissive properties of which can be selectively
10 controlled, wherein single-color images representing separate
components of the color image are formed by sequentially
activating successive lines of light valves in the matrix of light
valves;

a plurality of colored light sources which are strobed to
15 provide light for transmission through that portion of the
matrix of light valves corresponding to the component of the
color image; and

means for activating each of the colored light sources in
spatial correspondence with the scanning of the lines of the
20 light valve matrix.

16. The apparatus of claim 15, wherein:
each of the light valves in said matrix of light valves is a
liquid crystal device, the light transmissive properties of which
25 are externally controlled;

each of said plurality of colored light sources includes a
plurality of individual colored light sources which may be
independently activated; and

the individual colored light sources of each one of said
30 plurality of colored light sources are spatially interleaved with
the individual colored light sources of the other ones of said
plurality of colored light sources.

17. The apparatus of claim 16 wherein each of said
35 individual colored light sources is a fluorescent lamp including a
hollow translucent form having a long dimension and a short
dimension, said form being coated with a fluorescent material

which emits light of said color except for a stripe parallel to the long dimension which is not coated.

18. The apparatus of claim 17 wherein each of said
5 individual colored light sources is a fluorescent lamp coated with a fluorescent material except for a stripe parallel to the long dimension which is not coated.

19. The apparatus of claim 16 wherein, each of said liquid
10 crystal devices includes a twisted nematic liquid crystal material sandwiched between first and second control electrodes which are separated by a distance of less than four micrometers.

20. The apparatus of claim 16 wherein the light
15 transmissive properties of the light valves are controlled by an associated thin-film transistor.

21. A method for generating a color image, comprising the
20 steps of:

selectively controlling the light transmissive properties of a matrix of light valves in a display panel means wherein, single-color images representing separate components of the color image are formed by sequentially activating successive
25 lines of light valves in the matrix of light valves;

strobing a plurality of colored light sources to provide light for transmission through the matrix of light valves; and
activating each of the colored light sources in spatial
correspondence with the scanning of the lines of the light valve
30 matrix.

22. The method of claim 21, wherein:
each of the light valves in said matrix of light valves is a liquid crystal device, the light transmissive properties of which
35 are externally controlled;

each of said plurality of colored light sources includes a plurality of individual colored light sources which may be independently activated; and

5 the individual colored light sources of each one of said plurality of colored light sources are spatially interleaved with the individual colored light sources of the other ones of said plurality of colored light sources.

23 The method of claim 22 wherein the plurality of
10 colored light sources are configured to be alternately strobed in synchronism with the formation of single-color images on said matrix of light valves.

24. The method of claim 21 wherein wherein each of said
15 plurality of colored light sources includes a plurality of separately operable single-color light sources and the separately operable single-color light sources of said plurality of light sources are interleaved to provide illumination for said matrix of light valves.

20

AMENDED CLAIMS

[received by the International Bureau
on 9 April 1991 (09.04.91);

original claims 1-24 replaced by amended claims 1-24 (6 pages)]

1. Apparatus for generating a color image, comprising:

display panel means, including a matrix of light valves the light transmissive properties of which can be selectively controlled wherein, single-color images representing separate components of the color image are formed by sequentially activating successive lines of light valves in the matrix of light valves;

a plurality of colored light sources which are alternately strobed to directly emit light for transmission through the matrix of light valves, wherein each of the plurality of light sources may be selectively activated to provide light in at least two distinct spatial locations corresponding to respectively different lines of said light valves; and

means for activating each of the colored light sources in spatial correspondence with the scanning of the lines of the light valve matrix.

2. The apparatus of claim 1, wherein:

each of the light valves in said matrix of light valves is a liquid crystal device, the light transmissive properties of which are externally controlled;

each of said plurality of colored light sources includes a plurality of individual colored light sources which may be independently activated; and

the individual colored light sources of each one of said plurality of colored light sources are spatially interleaved with the individual colored light sources of the other ones of said plurality of colored light sources.

3. The apparatus of claim 2 wherein each of said individual colored light sources includes a fluorescent lamp which has a hollow translucent form having a long dimension and a short dimension, said form being coated with a fluorescent material which emits light of said color.

4. The apparatus of claim 3 wherein each of said fluorescent lamps are coated with a fluorescent material except for a stripe parallel to the long dimension which is not coated.

5. The apparatus of claim 2 wherein, each of said liquid crystal devices includes a twisted nematic liquid crystal material sandwiched between first and second control electrodes which are separated by a distance of less than four micrometers.

6. The apparatus of claim 2 wherein the light transmissive properties of each of the light valves is controlled by an associated thin-film transistor.

7. Apparatus for generating a color image, comprising:
display panel means, including a matrix of light valves the light transmissive properties of which can be individually controlled, wherein, single-color images representing separate components of the color image are formed by activating the light valves in the matrix of light valves in a predetermined sequence; and

a plurality of colored light sources each including a plurality of separately operable light sources which directly emit light of a single color wherein the separately operable single-color light sources of said plurality of light sources are interleaved; and

means for sequentially strobing each of said plurality of separately operable single color light sources of each of said plurality of colored light sources in synchronism with the formation of each respective single-color image on said matrix of light valves to provide light for transmission through the matrix of light valves.

8. The apparatus of claim 7 wherein:

the light valves in said matrix of light valves are arranged in rows and columns and said single color images are formed by activating successive rows of light valves in said matrix; and

said apparatus further comprises means for activating successive ones of said separately operable single-color light sources of each of said plurality of colored light sources in synchronism with the activation of successive rows of light valves in said matrix.

9. The apparatus of claim 8 wherein each of said individual colored light sources includes a fluorescent lamp which has a hollow translucent form having a long dimension and a short dimension, said form being coated with a fluorescent material which emits light of said color.

10. The apparatus of claim 9 wherein each of said fluorescent lamps is coated with a fluorescent material except for a stripe parallel to the long dimension which is not coated.

11. The apparatus of claim 7 wherein:

each of the light valves in said matrix of light valves is a liquid crystal device, the light transmissive properties of which are externally controlled; and

each of said liquid crystal devices includes a twisted nematic liquid crystal material sandwiched between first and second control electrodes which are separated by a distance of less than four micrometers.

12. The apparatus of claim 11 wherein the light transmissive properties of each of the light valves is controlled by an associated thin-film transistor.

13. Apparatus for generating a color image, comprising:

an image forming region comprising a matrix of light valves the light transmissive properties of which can be individually controlled;

first backlighting means for directly emitting light of a first color to illuminate a first portion of said image forming region; and

second backlighting means for simultaneously directly emitting light of a second color to illuminate a second portion of said image forming region, distinct from said first portion.

14. The apparatus of Claim 13 wherein:

the light valves in said matrix of light valves are arranged in rows and columns and said images are formed by activating successive rows of light valves in said matrix.

15. Apparatus for generating a color image, comprising:

display panel means, including a matrix of light valves the light transmissive properties of which can be selectively controlled wherein, single-color images representing separate components of the color image are formed by sequentially activating successive lines of light valves in the matrix of light valves;

a plurality of colored light sources which are alternately strobed to directly emit light for transmission through the matrix of light valves corresponding to the component of the color image, wherein each of said plurality of light sources may be selectively activated to provide light in at least two distinct spatial locations corresponding to respectively different lines of said light valves; and

means for activating each of the colored light sources by sequentially selecting each of the distinct spatial locations that may be illuminated by the light source in synchronism with the activation of the respective lines of the matrix of light valves.

16. The apparatus of claim 15, wherein:

each of the light valves in said matrix of light valves is a liquid crystal device, the light transmissive properties of which are externally controlled;

each of said plurality of colored light sources includes a plurality of individual colored light sources which may be independently activated; and

the individual colored light sources of each one of said plurality of colored light sources are spatially interleaved with the individual colored light sources of the other ones of said plurality of colored light sources.

17. The apparatus of 16 wherein each of said individual colored light sources includes a fluorescent lamp which has a hollow translucent form having a long dimension and a short dimension, said form being coated with a fluorescent material which emits light of said color.

18. The apparatus of claim 17 wherein each of said fluorescent lamps is coated with a fluorescent material except for a stripe parallel to the long dimension which is not coated.

19. The apparatus of claim 16 wherein, each of said liquid crystal devices includes a twisted nematic liquid crystal material sandwiched between first and second control electrodes which are separated by a distance of less than four micrometers.

20. The apparatus of claim 16 wherein the light transmissive properties of each of the light valves is controlled by an associated thin-film transistor.

21. A method for generating a color image, comprising the steps of:

selectively controlling the light transmissive properties of a matrix of light valves in a display panel means wherein, single-color images representing separate components of the color image are formed by sequentially activating successive lines of light valves in the matrix of light valves;

strobing a plurality of colored light sources to directly emit light for transmission through the matrix of light valves, wherein each of said plurality of light sources may be selectively activated to provide light in at least two distinct spatial locations corresponding to respectively different lines of said light valves; and

activating each of the colored light sources in spatial correspondence with the scanning of the lines of the light valve matrix.

22. The method of claim 21, wherein:

each of the light valves in said matrix of light valves is a liquid crystal device, the light transmissive properties of which are externally controlled;

each of said plurality of colored light sources includes a plurality of individual colored light sources which may be independently activated; and

the individual colored light sources of each one of said plurality of colored light sources are spatially interleaved with the individual colored light sources of the other ones of said plurality of colored light sources.

23 The method of claim 22 wherein the plurality of colored light sources are configured to be alternately strobed in synchronism with the formation of single-color images on said matrix of light valves.

24. The method of claim 21 wherein each of said plurality of colored light sources includes a plurality of separately operable single-color light sources and the separately operable single-color light sources of said plurality of light sources are interleaved to provide illumination for said matrix of light valves.

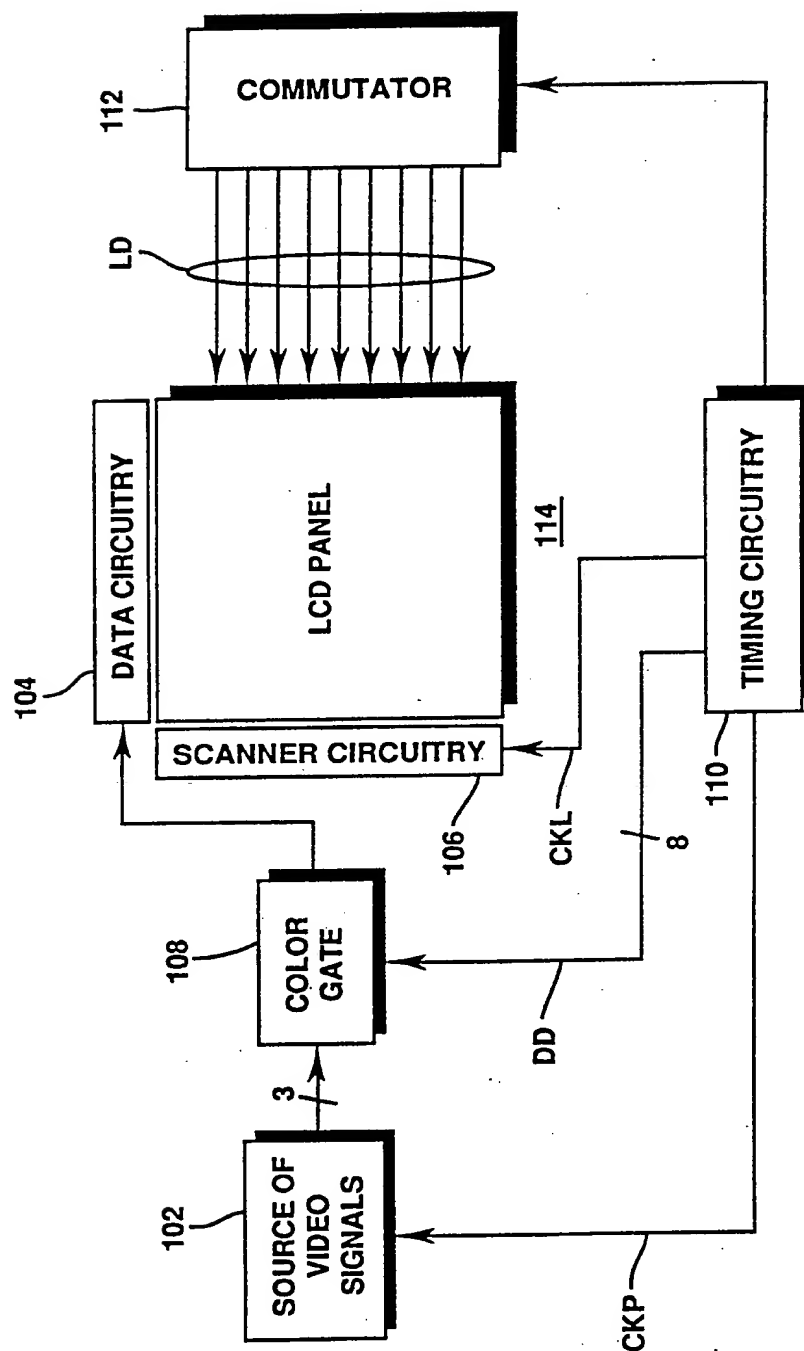


Fig. 1

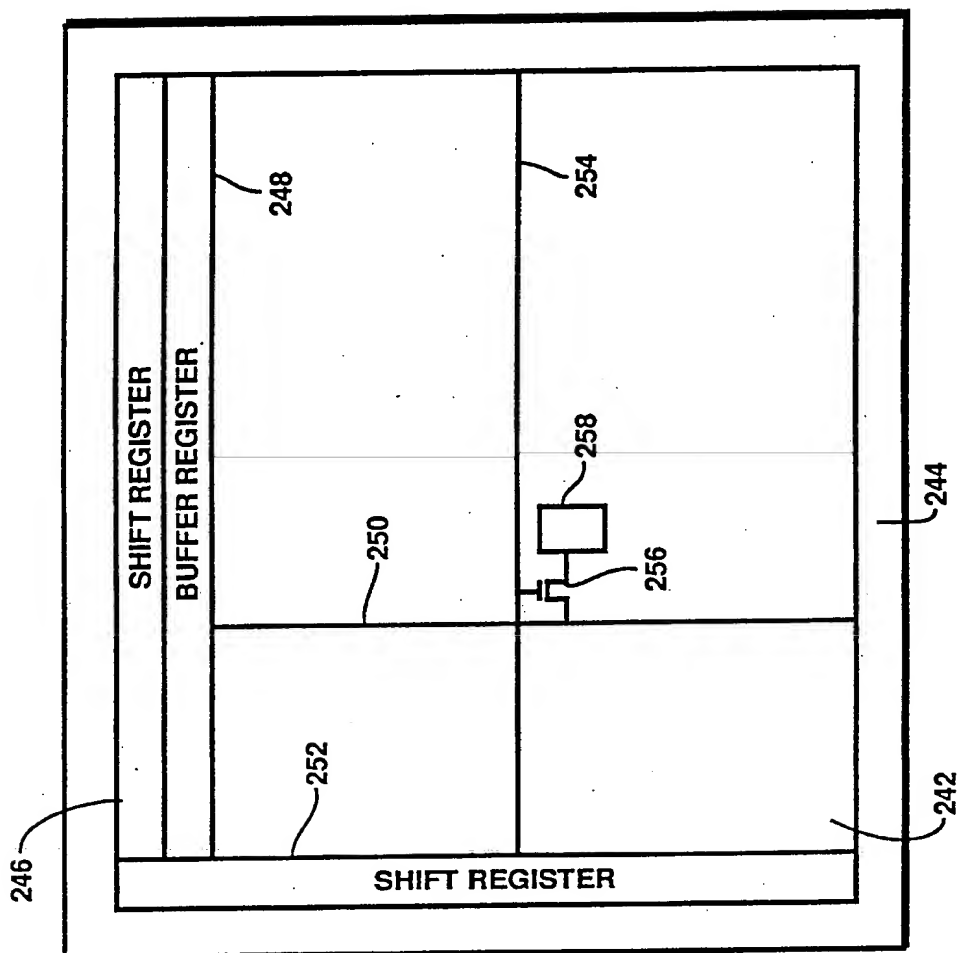


Fig. 2b

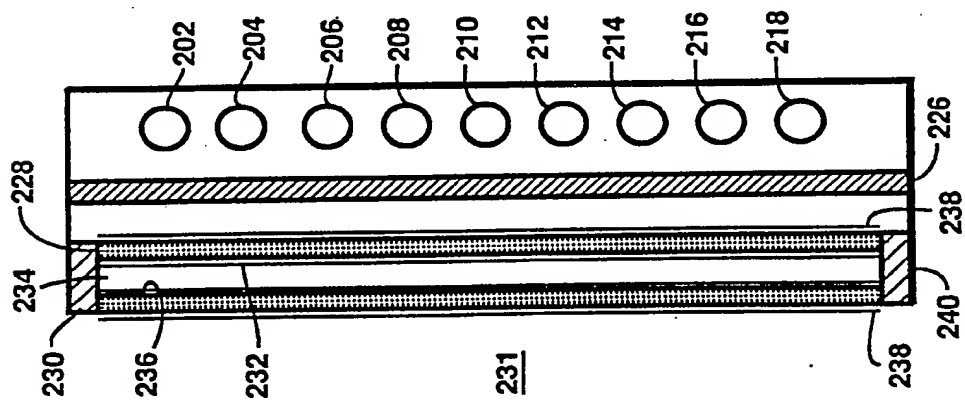
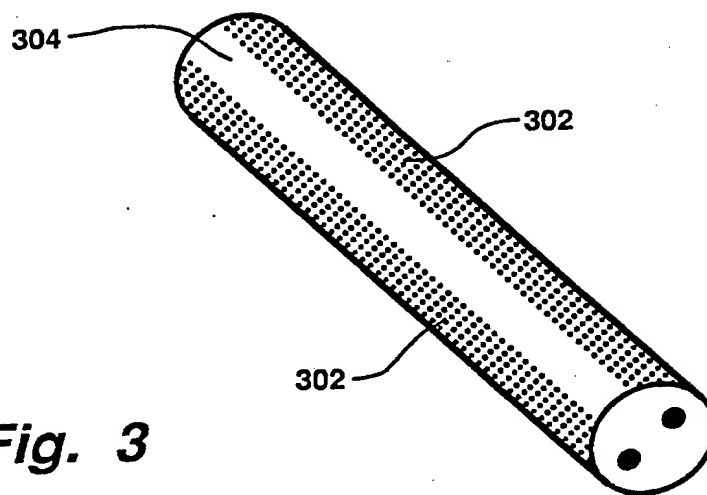
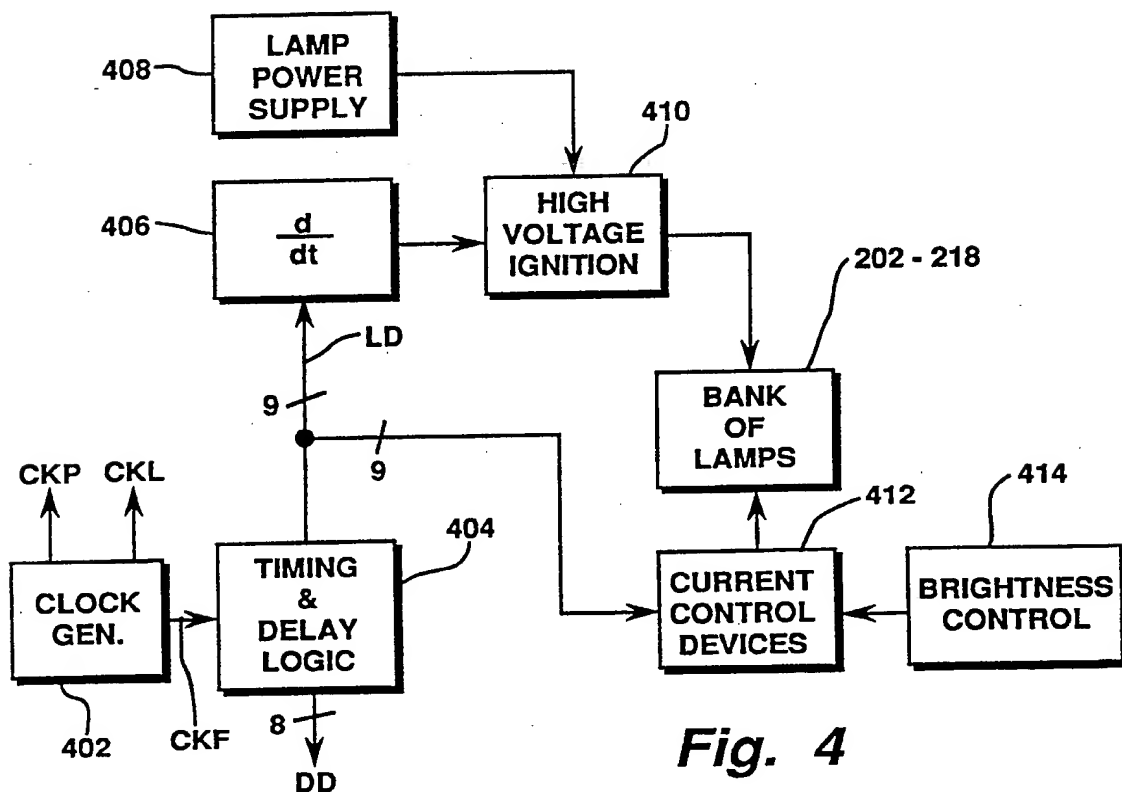


Fig. 2a

**Fig. 3****Fig. 4**

4/5

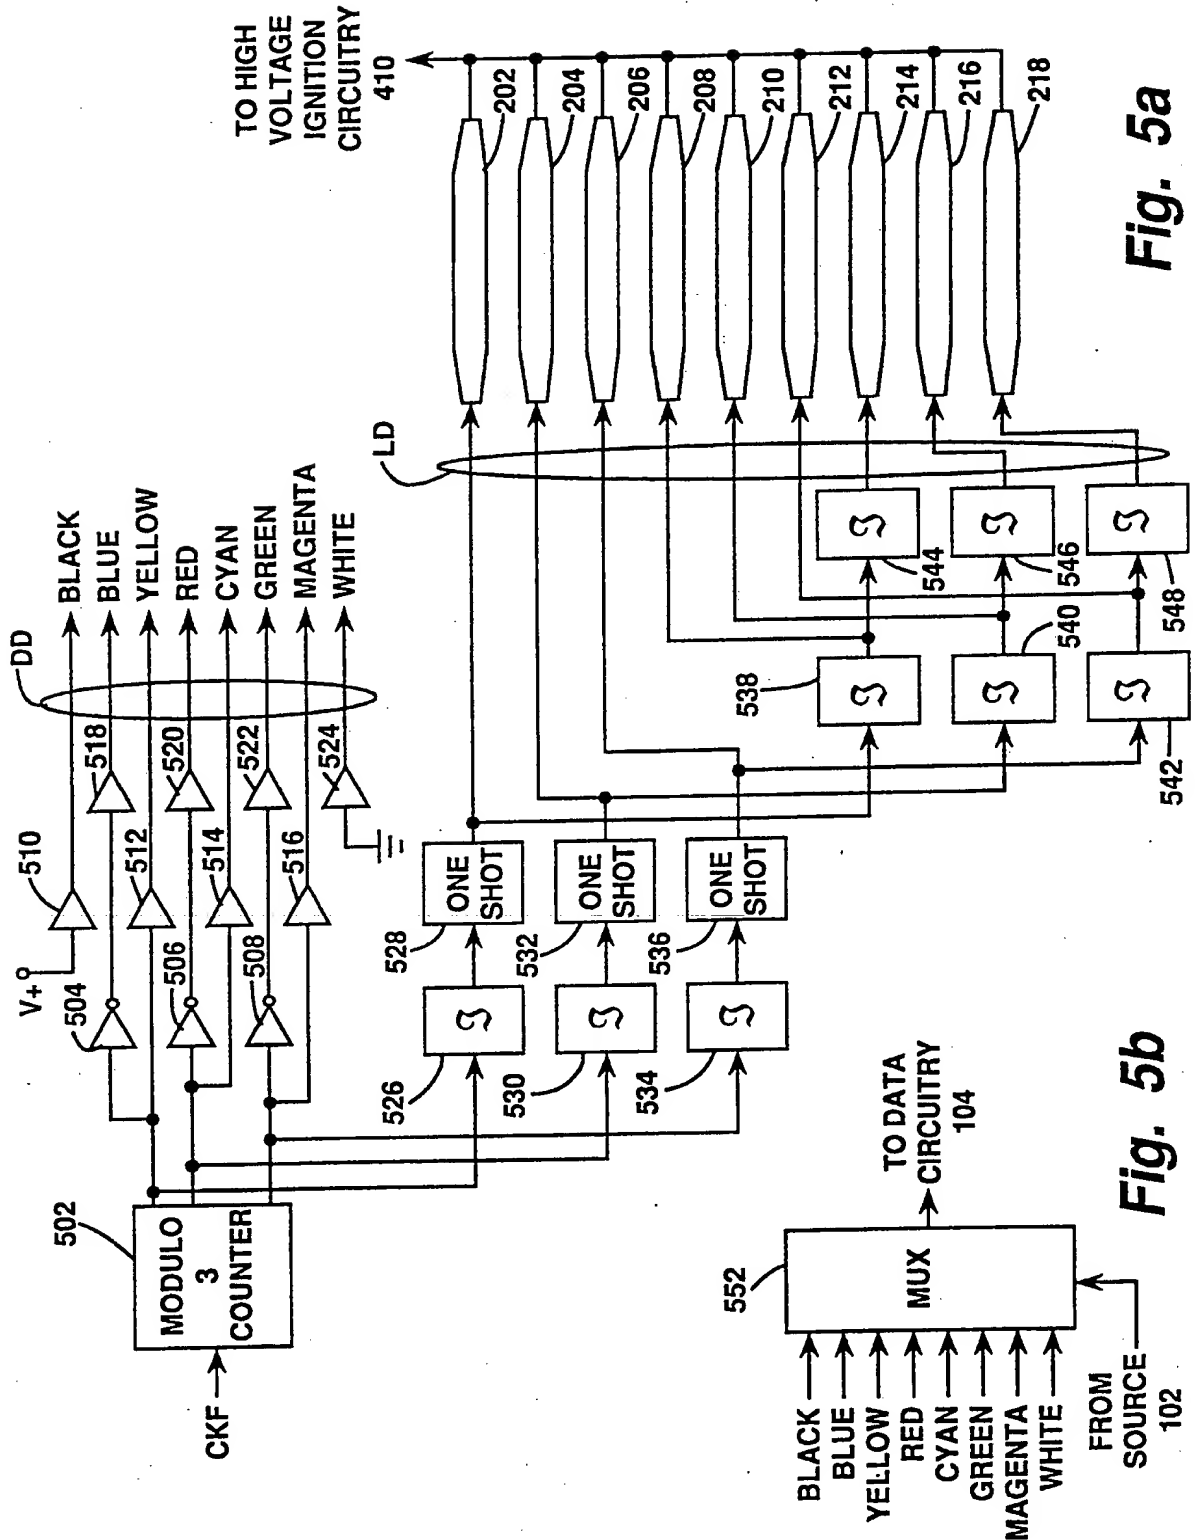
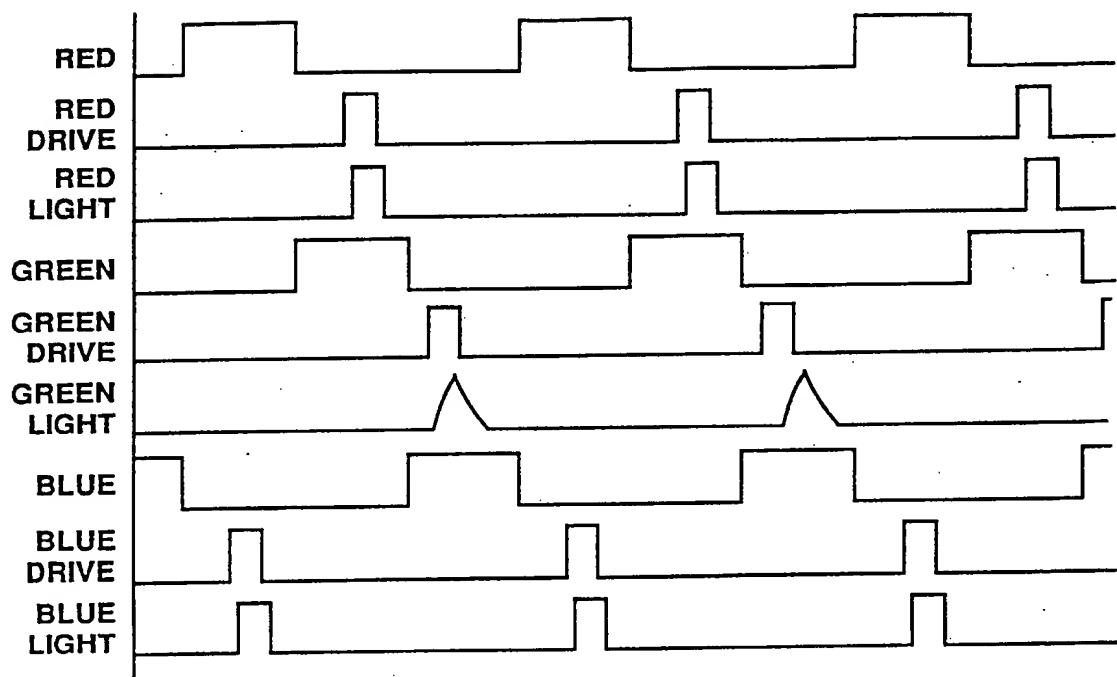
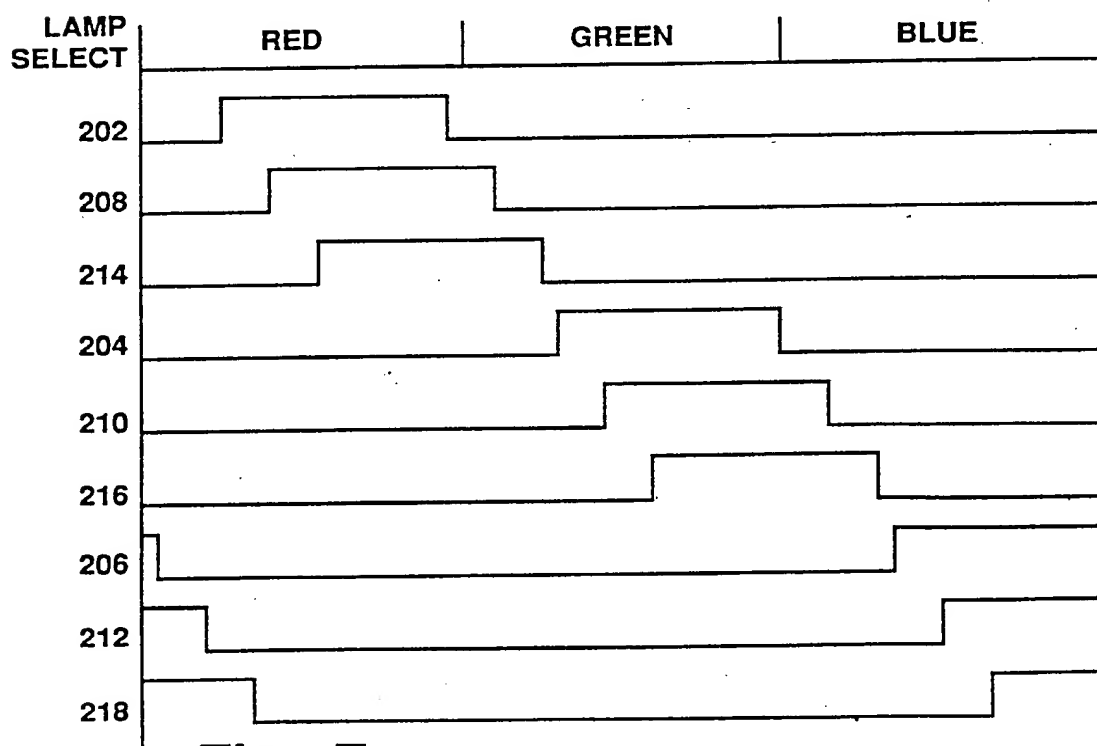


Fig. 5a

Fig. 5b

5/5

**Fig. 6****Fig. 7**

INTERNATIONAL SEARCH REPORT

International Application No. PCT/US90/06206

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ³		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC (5): G09G 1/28		
U.S. CL: 340/701, 784; 350/345		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁴		
Classification System	Classification Symbols	
U.S.	340/701, 784; 350/345; 362/31; 313/488	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁵		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴		
Category ⁶	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
X,E	US, A, 4,907,862 (SUNTOLA) 13 March 1990 See entire document.	1,2,6,7,8,15 16,20-24 3-5, 9-14 17-19
Y		
Y	US, A, 4,661,890 (WATANABE et al.) 28 April 1987 See column 2.	3,4,9,10,17,18
Y	US, A, 4,678,285 (OHTA et al.) 07 July 1987 See the entire document.	5,11,12,19
Y,E	US, A, 4,924,215 (NELSON) 08 May 1990 See column 5, lines 52-62.	5,11,12,19
<p>¹⁵ Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"Z" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search ¹	Date of Mailing of this International Search Report ²	
09 January 1991	14 FEB 1991	
International Searching Authority ¹	Signature of Authorized Officer ² <i>Nguyen Ngoc-Ho</i>	
ISA/US	Mike Fatahiyar NGUYEN NGOC-HO INTERNATIONAL DIVISION	